


25 Series

Trim designs

Functionality built into the trim, facilitating easy door preps, easy field retrofit and easy ordering.

Lever trims (510L)

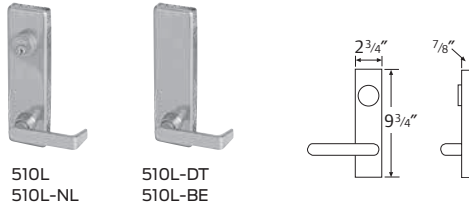

510L
510L-NL

510L-DT
510L-BE

Lever designs



Avalon
Projection: 3 1/4"

Dane
Projection: 3"

Sutro
Projection: 3 1/4"

Quantum
Projection: 3 1/4"

All levers return to within 1/2" of door.

Escutcheon: 9 3/4" (H) x 2 3/4" (W) (specify handing) brass finish.

Protected by easily replaceable shear pin.

Lever is reversible, supplied RHR if not specified. For keyed functions, see page 14 for cylinder requirements.

Vandal - resistant lever trims (511L)



Provides resistance to rotation, making damage of trim due to attack from the outside less likely. Designed to operate normally after vandalism attempts without the need for maintenance personnel intervention.

- Heavy duty, vandal-resistant, ANSI A156.3 grade 1 security trim.
- Lever deflects up to 22 ft-lb for a minimum of 10,000 vandal-resistant cycles.
- Vandal resistance is present in both lever rotation directions.
- After lever is fully deflected, lever stops rotating and a shear pin breaks at 70 ft-lb to prevent damage to unit.
- Available on 25 rim, vertical, mortise, and concealed devices.
- Retrofits all existing 25 trim without additional door prep.
- Works with all electric lock and unlock functions.
- Available in all finishes and designs including Avalon, Dane, Quantum and Sutro.

Pull trims (512)



512TP

512NL

512DT

512TP-BE

Delta (717)



717DT

Escutcheon: 16" x 2 3/4"

Grip: 6 1/4" C- C

Projection: 2 11/16"

Brass

For keyed functions, see page 14 for cylinder requirements.

Knob trims (513K)



513K-DT
513K-BE

513K
513K-NL

Round ball knob

Escutcheon: 9 3/4" x 2 3/4"

Projection: 4"

Brass

For keyed functions, see page 14 for cylinder requirements.

Cylinder only (NL-OP)

Key retracts latch bolt.
Cylinder sold separately
(see page 14).